

# NORDIC PLUS 67/60



NORDIC PLUS (with ventilation) - Forced convection - Sealed device      New look door (NO67/60.10A)

Kw	efficiency %	CO (mg/Nm <sup>3</sup> )	COG (mg/Nm <sup>3</sup> )	Dust (mg/Nm <sup>3</sup> )	NOX (mg/Nm <sup>3</sup> )	el_max (kw)	el_min (kw)	el_sb (kw)
15	77	1238	43	37	53	0,052	0,037	0,001

Options      → External dimensions (mm) : 670 x 600 x 420

Finishing frame 67/60 - 3 sided      → 740 x 631,5

Finishing frame 67/60 - 4 sided      → 740 x 670

Speed controller with airstat

Speed controller with thermostat ambient temperature





Hot air tubes kit 125 Ø+ Air stop kit

Reserve door fitting

Extra charge for black painted vermic. interior

## Included

Automatic thermostat - external air intake Ø 100 mm - baffle vermiculite - double grill - ashtray - stop embers - centrifugal fans - speed controller - airstat - interior vermiculite - 45° bent and straight stainless steel pipe for DS for smoke outlet (diameters see drawings) - filters - colour antracite - WITHOUT FINISHING FRAME (following your choice)  
Real view of fire (mm) - 531 x 340

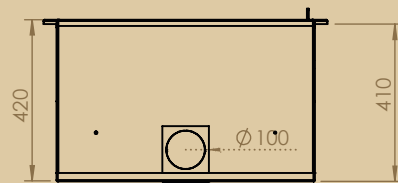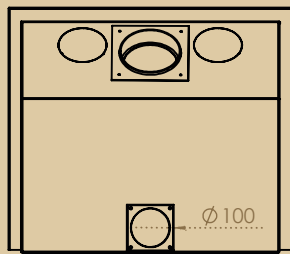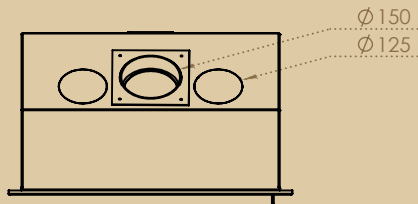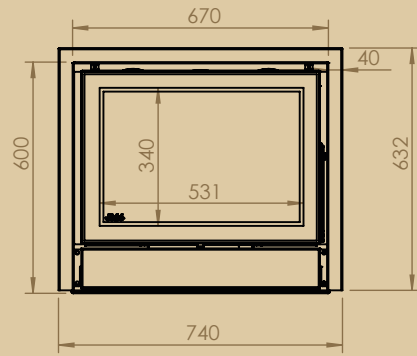

NOTES :

.....  
.....  
.....  
.....  
.....  
.....  
.....  
.....  
.....