

NORDIC PLUS 77 DS



NORDIC PLUS (with ventilation) - Forced convection - Sealed device

New look door (NO77DF.10A)

Kw	efficiency %	CO (mg/Nm ³)	COG (mg/Nm ³)	Dust (mg/Nm ³)	NOX (mg/Nm ³)	el_max (kw)	el_min (kw)	el_sb (kw)
15	77	1238	120	37	34	0,052	0,037	0,001

Options

Finishing frame 77/60 - 3 sided

Finishing frame 77/60 - 4 sided

Speed controller with airstat

Speed controller with thermostat ambient temperature

Hot air tubes kit Ø 150 + Air stop kit DS

Reserve door fitting

Extra charge for black painted vermic. interior





→ External dimensions (mm) : 770 x 600 x 570

→ 840 x 632

→ 840 x 670

Included

Automatic thermostat - external air intake Ø 100 mm - baffle vermiculite - double grill - ashtray - stop embers - centrifugal fans - speed controller - airstat - interior vermiculite - 45° bent and straight stainless steel pipe for DS for smoke outlet (diameters see drawings) - filters - colour antracite - WITHOUT FINISHING FRAME (following your choice)
Real view of fire (mm) - 631 x 340

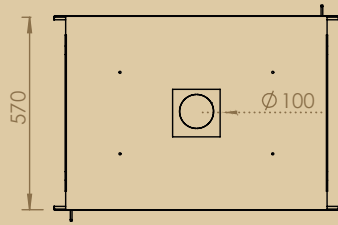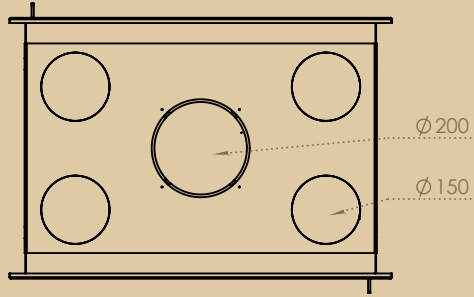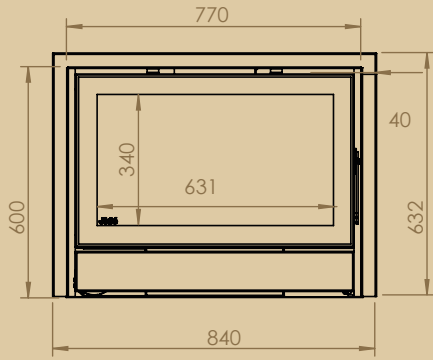

NOTES :
